




Professional Office / Contact Centre Headsets

COMMANDER
BY JPL



Commander QD

Fitted with 60mm leatherette ear cushions and padded T-bar and premium audio speakers designed for music and speech, ideal for users moving to PC telephony for webinars, conference calls, music and other multimedia applications.

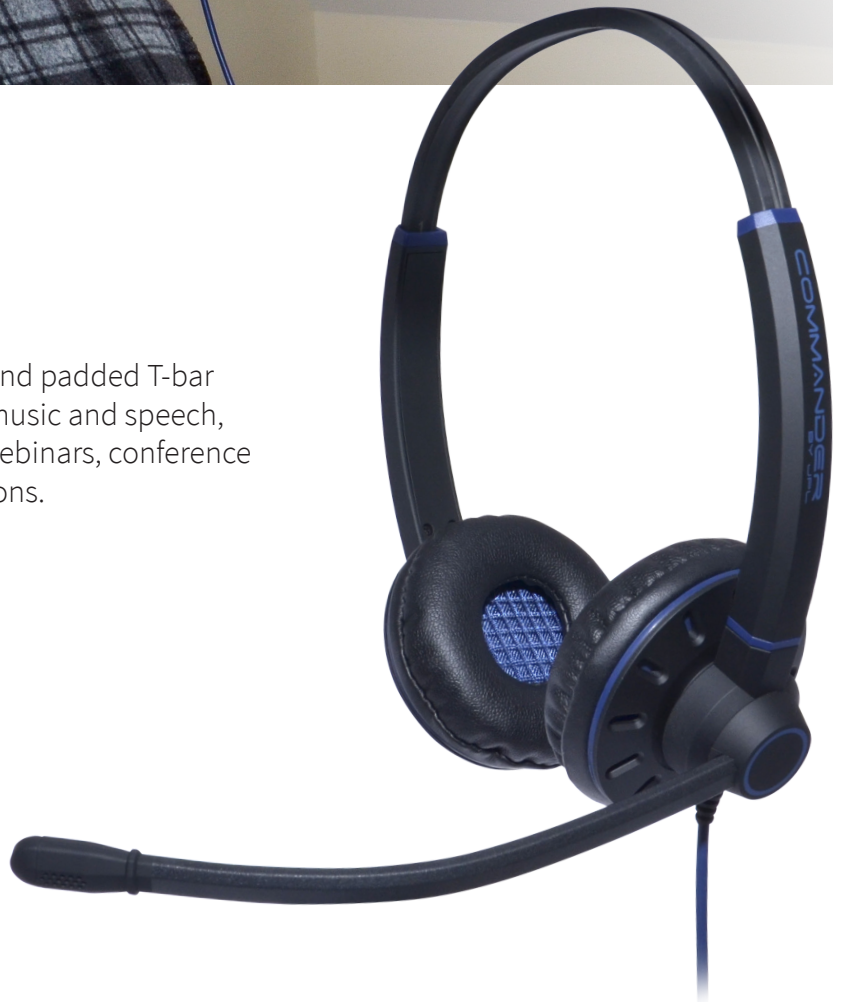

tele cron

telecroatian network
www.telecron.net




Order Code
Commander-PB

Order Code
Commander-PM



JPL/PLX
COMPATIBLE QD



LEATHERETTE
CUSHION



SOFT SHELL
CARRY CASE

Overview

Features	Left / right speaker side compatible Premium audio speakers designed for music and speech Surround Shield™ noise cancelling microphone Fully flexible microphone for exact positioning 270° adjustable microphone boom 'Put and stay' ratchet microphone boom arm Swivel T-bar with soft feel padded leatherette cushion Overhead, sure-fit fully adjustable headband
What's included	Headset fitted with 60mm leatherette ear cushions and supplied with Quick Start Guide and soft shell carry case
Headset Weight	~ 62g / ~ 82g
Connection	PLX fitted as standard or GN** compatible QD options
Compatibility	For full range of bottom leads* and compatibility information - Go to Jpltele.com
Certifications	UKCA, CE, FCC, RoHS, REACH
Warranty	2 Years repair or replacement warranty
MOQ	Master Shipping Carton: 40
EAN:	Commander-PM: 5060126959083, Commander-PB: 5060126959106
SKU:	Commander-PM: 575-365-003, Commander-PB: 575-365-004

Technical Data

Microphone:	
Directivity:	Unidirectional
Impedance:	1.0kΩ
Sensitivity:	-49±3dB (0dB=1V/Pa)
Frequency Range:	100-16,000Hz
Operating Temp:	-20°C~+60°C
Storage Temp:	-25°C~+70°C
Speaker:	
Size:	ø30 mm
Input Power:	50 mW (1.26V)
Max Power:	100 mW (1.79V)
Impedance:	32Ω ±10% at 1kHz, 0.18V
Sound Pressure:	122±3dB at 1kHz
Resonance Frequency:	150±30 (20%) Hz
Frequency Range:	20Hz ~ 20,000Hz
Operating Temp:	-25°C ~ +50°C
Storage Temp:	-25°C ~ +50°C