


Premium Pigtails

Our premium low loss range of pigtails are suitable for telecom, datacom, data center and some critical applications. The pigtails provide 900 μm buffered fiber for ease of handling in fiber management such as panels, splice cassettes and wall boxes. The pigtails are terminated with premium range physical contact (single mode & multimode) and angled physical contact (single mode) zirconia ferrule connectors which are manufactured with precision factory mounting and polishing techniques which helps assure high transmission quality

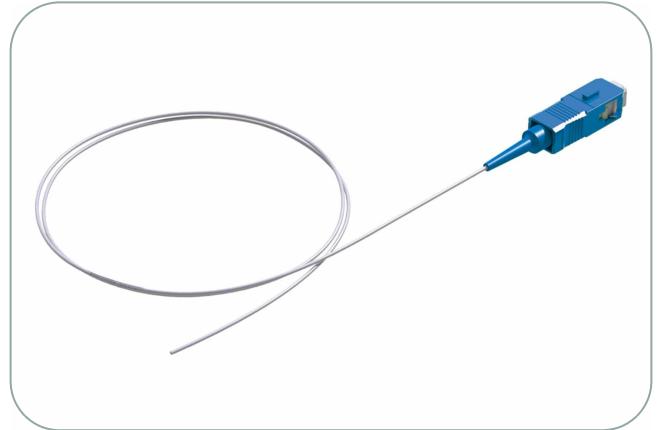

Features

- Exceed IEC performance requirements
- Easy to strip pigtails for on site installation
- Available in different fiber types
- Available with different connector types
- Provided in individual packaging or in packs of 12 x color easy strip pigtails as per IEC 60304
- Tight buffer or Easy Strip buffer low smoke zero halogen (LSZH) material with 900 micron diameter
- REACH & SvHC compliant
- Materials compliant to RoHS2

Applications

- Patch panels, wall boxes, ODFs and splice cassettes
- Enterprise
- Datacom
- LAN and WAN
- FTTX
- Broadband network

Specifications

OPTICAL PERFORMANCE	SINGLE MODE	MULTIMODE	CONFORMANCE
IL (maximum - factory tested)	0.15 dB	0.15 dB	IEC 61300-3-4
Average/Random	0.12 dB	0.10 dB	IEC 61300-3-34
Return Loss (Min)	55/65 dB	20 dB*	IEC 61300-3-6

*Return Loss based on sample data

Cable Specification

CHARACTERISTICS	UNITS	SIMPLEX
Crush	N/100 mm	500
Operating Temperature	°C	-20 to 60

CHARACTERISTICS	UNITS	SIMPLEX
Stripping Length - Easy Strip	m	1.5 minimum
Stripping Length - Tight buffer	mm	30 nominal
Nominal buffer Diameter	µm	900 ± 50
Max Tensile Load	N	6

Ordering Information

Code	Fibre Type	Cable Type	Fiber Count	Code	Color	Grade	Connect or	Code	Unit	Length	
P	9 G.652D	AA Easy Strip	1 Single Pigtail	L	6 WHITE	P	AX LC	-0000-	Single Pigtail	M Meters	1 1
	7 G.657A1	AC Tight Buffered	B Pack of 12		H 12 Colours		BX LCA	-0002-	12 in one Bag		2 2
	1 OM1						DX SC				
	2 OM2						EX SCA				
	3 OM3						HX FC				
	4 OM4						JX FCA				
							KX ST				
							LX E2				
							JX E2A				

Legacy Ordering Information

Connector End	Fiber Type	Cable Configuration	Cable Length	Cable Construction
FC FC	09 OS1/OS2	B	1 1 metre	Leave Blank Tight Buffer -P
LC LC	62 OM1		2 2 metre	EASY Easy strip
SC SC	50 OM2			-12/1B Tight Buffer - Pack of 12 colours
ST ST	OM3 OM3			E-12/1B Easy strip - Pack of 12 colours
FCA FC/A	OM4 OM4			
LCA LC/A	7A1 G.657A1			
SCA SC/A				

Example Part Number

SC	09	B	1	-P
----	----	---	---	----

This part number has created a premium 1 metre SC SM white pigtail.